


IEM Amplifiers

High Performance Amplifier
 50kHz Bandwidth
 10 to 1000 Adjustable Gain Range
 Reverse Polarity Protection

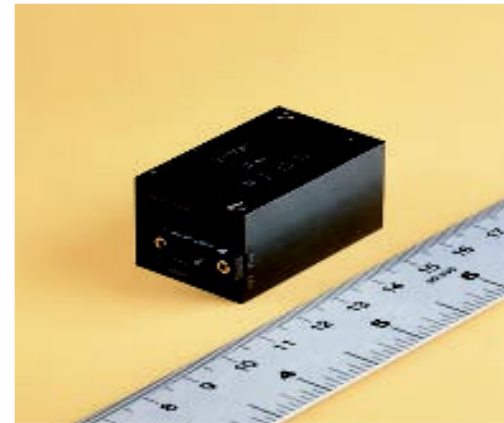


The compact IEM Amplifiers

provide adjustable 10 to 1000 gain over a 50kHz bandwidth. Each Unit features 0.1% non-linearity error and reverse polarity and surge protection. Depending on options, sensor supply voltage can be 5 VDC, 10 VDC or 15 VDC. Common mode rejection is 120dB. Mating connectors are available for connector options and factory-wiring to the sensor is available upon request.

dimensions

-WW Model

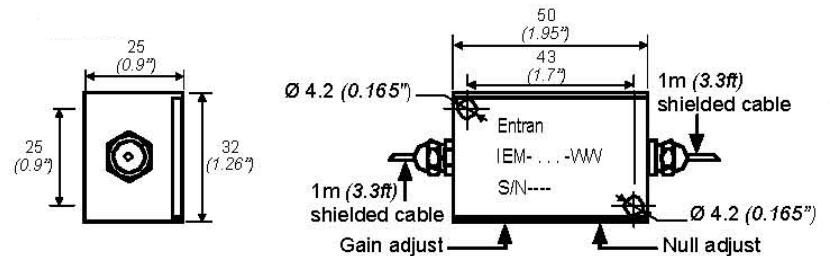


-22 Model




wiring

-WW Model

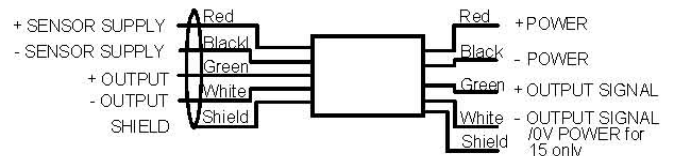

-22 Model

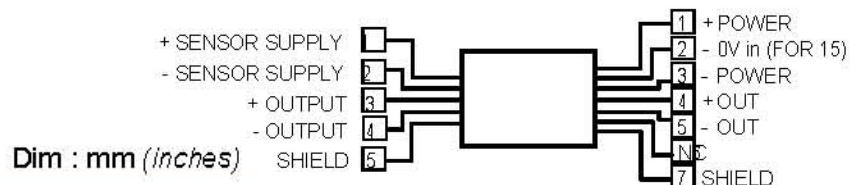

FEATURES

- Compact size
- Rugged construction
- Attractive packaging
- Surge protection
- Optional wiring configuration
- Wide operating temperature

APPLICATIONS

- Instrumentation Labs
- Test Stands
- Process Monitoring
- In-line Amplifiers

Supply for Sensors, General Characteristics, Options & Accessories

SENSOR SUPPLY VOLTAGE:	05 = 5V for Power type 12U 05 = 5V or 10 = 10V or 15 = 15V for Power type 15
SENSOR SUPPLY CURRENT max.:	20mA
COMMON MODE REJECTION:	120dB
CE CONFORMANCE:	EN61010-1, EN 50081-1, EN 50082-1
OPERATING TEMPERATURE:	-20°C to 70°C (-4°F to 158°F)
STORAGE TEMPERATURE:	-55°C to 125°C (-67°F to 257°F)
WIRING:	WW = Shielded cable input and output 22 = Binder cylindrical connector (input/output) with unwired mate
SPECIAL CABLE LENGTH ON TYPE WW ONLY:	L00F = Replace "00" with total length in feet. L00M = Replace "00" with total length in meters.
CONNECTOR WIRED TO OUTPUT CABLE TYPE WW:	C = Microtech type male or equivalent (w/o mate) RS = RJ Telephone type male (w/o mate) WI = Wire to sensor
WIRE AMPLIFIER INPUT TO A SENSOR:	WI = Wire to sensor
MATING CONNECTORS FOR CONNECTOR OPTIONS:	See Cable and Connector Bulletins

Amplifier Performance

GAIN (G):	10 to 1000 adjustable	
BANDWIDTH (-3dB) nom.:	50KHz	
POWER REQUIRED:	15 = ±15VDC	12U = 8 to 28VDC Unreg.
INPUT CURRENT WITHOUT SENSOR:	10mA for Power type 15	40mA for Power type 12U
OUTPUT SIGNAL max.:	±13V for Power type 15	±5V for Power type 12U
OUTPUT CURRENT max.:	5mA	
BASE LINE (NULL) ADJUSTABILITY:	±5V for Power type 15	±2.5V for Power type 12U
NON-LINEARITY max.:	0.1%	
INPUT IMPEDANCE nom.:	10MΩ	
OUTPUT IMPEDANCE nom.:	100Ω	
INPUT PROTECTION:	Reverse Polarity and Surge Protected (600V, 10μs & 60V, 0.1s)	

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Model number construction

Series	Power Required	Sensor Supply Voltage	Gain	(IN/OUT)	
IEM	15 12 U	05 10 15 05 05 10 15	1000R	Cable or Connector WW 22	C or RS L00F or L00M WI
Example: IEM-15/05/1000R-WW					
Model IEM, ±15VDC power, 5V Sensor Supply, 1000 Gain, Cable Input and Output					